Silent+ MINI WHITE

CONDENSATE REMOVAL PUMP





Now even easier to install. A fitting template is part of the box, so simply cut off and use to mark screw holes on the wall.

Under the inner flap there is also a guick start guide. This shows the basic steps for installing the the World's guietest mini pump.







Easy to install. aspenpumps.com















Silent+ MINI WHITE

CONDENSATE REMOVAL PUMP

The World's quietest mini pump ideal to fit anywhere that demands some peace and quiet!





Mini Aqua⁶

The World's thinnest condensate pump is designed to fit where no other pump can be installed.



Maximum flow rate of 12l/h



Max. rec. height: 10m (flow rate 6l/h)





21 dB(A) at 1m

Part No. FP2406/2

Mini Orange[®]

The best-selling Mini Orange is a highly reliable pump with unrivalled performance.




Maximum flow rate of 12l/h



Max. rec. height: 10m (flow rate 6l/h)



21 dB(A) at 1m



Part No. FP2212

Mini Tank

The Mini Tank pump can be installed on the floor, on the wall or on M8 or M10 threaded rods. This piston pump is compared powerful and, above all, watertight (IP65).



Maximum flow rate 35l/h Max. rec. head: 15m (flow rate 10l/h)



Residential











Silent⁺ MINI WHITE

CONDENSATE REMOVAL PUMP

Todays users demand quiet condensate pumps, in offices or hotels, but equally in the home.

The **Silent+** range is designed on the basis of a "whole system approach" to ensure the quietest possible operation without compromising performance.

The **Silent+ Mini White** is the World's quietest mini pump so you can guarantee that it wont be heard.




Make sure you install a good night's sleep!

Incredibly quiet, easy to install and maintain, the **Silent+ Mini White** has been designed to fit either side of the evaporator unit. A double insulated reservoir eliminates condensation and is simple to unclip for cleaning and maintenance.

KEY FEATURES:

- **1 Easy installation**Position inlet left or right for installation flexibility.
- 2 Rotary diaphragm pump Mitigates noise at higher flow rates Increased flow rates/head.
- **3 Flexible inlet**Suits various inlet pipe sizes and limits sound travel.

- 4 Capacitance technology
- Pump matches inflow rate perfectly for quietest possible performance.
- 5 Thermally insulated reservoir (featuring 3 stage filtration process)
 Simple clip/unclip single handed removal.
- **6 Adaptive level sensing**Discreetly self adapts to a thousand inflow water levels for optimum performance.
- **7 Optional easy-fit installation spacer**Enables power cables and pipework to be routed through AC unit knock out points.
- **8 Accessories**Comes with a range of accesories for easy install.

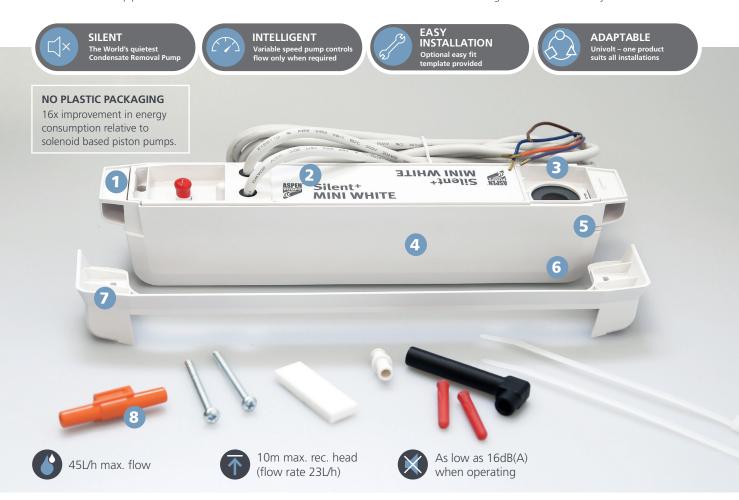

Further information: aspenpumps.com